



European
Ceramics

TIMELESS RANGE

BUILDING PRODUCT INFORMATION REQUIREMENTS (BPIR) – CLASS 1

This document is intended to provide the building product information required for a Class 1 designated building product under the (Building Product Information Requirements) Building Regulations 2022.

Product Name:	TIMELESS RANGE - VARIOUS COLOURS/FINISHES/SIZES/THICKNESS
Product Identifier:	Refer to tile name and product code on paperwork/packaging.
Product Description:	A glazed porcelain tile and a water absorption rate of less than 0.50% designed as a finished product to complete the chosen aesthetic of a building project.
Intended Use:	Porcelain tiles from this range can be installed in line with NZ Building Code requirements and BRANZ best practices. Porcelain tiles are an aesthetic finish to a surface not intended to be load bearing or structural.
Country of Origin:	Italy

Building Code Obligations

Within the intended scope of use, the existing European Ceramics BPIR identifies the following Building Code clauses as potentially relevant. Applicability depends on the actual location and design use:

- B2 – Durability (including B2.3.1)
- C3 – Fire affecting areas beyond the source
- D1 – Access routes (including D1.3.3)
- E3 – Internal moisture (including E3.3.2, E3.3.3 and E3.3.4)
- G3 – Food preparation and prevention of contamination (including G3.3.2)
- G6 – Airborne and impact sound (including G6.3.1 where applicable)



Importer Details:
European Ceramic Tiles Ltd
Address: 7A Cowley Place, Rosedale, AKL 0632
NZBN: 9429037294571
Website: euroceramics.co.nz

Note – this building product is not subject to a warning/ban under Section 26 of the Building Act 2004

Building Code References

B2 – Durability

Compliance with B2 Durability is about providing evidence that the product will meet the relevant durability life in the context of the environment in which it will be located.

The building code sets out the framework for establishing the relevant durability life of building elements based on a number of criteria. B2/AS1 provides a decision tree to establish the relevant durability for common building materials in different circumstances.

Having determined the durability of the product, the next step is to determine if the product, when exposed to the environment, will continue to perform for the relevant period. A key tool which a product supplier can consider in claiming compliance is limiting the environment in which the product will be exposed to (e.g. a ferrous material used in an indoor environment will last longer than it would when exposed to salt spray — in this example it would be appropriate for the supplier to condition the compliance information to use only in indoor environments).

C3 – Fire affecting areas beyond the source

C3 Fire affecting areas beyond the fire source is primarily about ensuring that fire does not spread from a fire in the building (in both vertically and horizontally) and from an adjacent building.

The prime product attribute used is the fire resistance rating (FRR) methodology. In most cases a product is combined with other products to achieve a FRR (e.g. an external wall fire rating may be formed by the combination of the external cladding, thermal insulation and the internal lining).

C/AS1 and C/AS2 set out performance criteria for buildings and in particular the FRR requirements for various types of buildings and parts of buildings. Appendix C of C/AS2 sets out test methods for the building elements involved in spread of fire. Appendix B of C/AS2 sets out performance criteria for sprinkler systems while Appendix A sets out criteria for fire safety systems such as alarms and hydrants.

D1 – Access routes

For D1 access routes, in most cases product-related compliance for access routes is slip resistance for floors and the shapes/locations etc of handrails. The Acceptable Solution for access D1/AS1 and NZS 4121:2001 provide good information on compliance for products on access routes.

E3 – Internal Moisture

E3 Internal Moisture is about ensuring that moisture created within the building does not lead to mould or damage to adjacent buildings or structural elements in the building in which it is installed.

Prevention of the creation of mould is a combination of temperature, insulation and ventilation. Prevention of water damaging other building elements is mainly about installation details (i.e. sealing joints) as well as impervious products. E3/AS1 provides some useful design details, albeit without much product material information.

G3 – Food preparation and prevention of contamination

G3 Food preparation and prevention from contamination for a product (such as a kitchen bench) is mainly associated with being easily cleaned and impervious. G3/AS1 provides some general design details for food preparation areas but has no referenced product standards, although the document does state some acceptable materials used for surfaces. Compliance with G3/AS1 is not mandatory but provides a good benchmark for compliance.



Importer Details:

European Ceramic Tiles Ltd

Address: 7A Cowley Place, Rosedale, AKL 0632

NZBN: 9429037294571

Website: euroceramics.co.nz

Note – this building product is not subject to a warning/ban under Section 26 of the Building Act 2004

G6 – Airborne and Impact Sound

For a product, G6 Airborne and impact sound is generally about systems which are designed to work together to achieve the necessary sound attenuation.

The code itself at G6.3.2 sets a quantifiable performance level: “The Sound Transmission Class of walls, floors and ceilings, shall be no less than 55” and G6.3.2 sets the impact insulation class of floors shall be no less than 55. The Acceptable Solution G6/AS1 sets out the transmission and impact insulation class of common wall systems. G6/VM1 sets out test methodologies where the details do not match those of G6/AS1.

Limitations of Use

Product technical/specification sheets from manufacturers outline composition details and characteristics including material, finishes, PEI ratings, size (including variations, calibrations, weights) colour and slip ratings. Tiles are a finishing product, consented plans or specification should be referred to in order to outline the details of suitability with regard to NZBC requirements.

<i>Suitability *</i>	<i>Residential</i>	<i>Light Commercial</i>	<i>Commercial</i>
Indoor Floor	*	*	*
Indoor Walls	*	*	*
Outdoor Cladding	*	*	*
Frost Resistant	*	*	*
Swimming Pool Submerged	*	*	*
Swimming Pool Surround	*	*	*
Paving/External	*	*	*
Over Underfloor Heating	*	*	*
Kitchen wall	*	*	*
Within 1.5m of a Plumbing Fixture or Fitting	*	*	*



Importer Details:

European Ceramic Tiles Ltd

Address: 7A Cowley Place, Rosedale, AKL 0632

NZBN: 9429037294571

Website: euroceramics.co.nz

Note – this building product is not subject to a warning/ban under Section 26 of the Building Act 2004

Manufacturer Information

Address: Via Canaletto 24, 41042 Fiorano Modenese MO, Italy

Website: <https://www.florim.com/en>

Email Address: info@florim.com

Technical Information

Product catalogue & technical/specification sheets for each range can be located [Click here](#)

FLORIM

DECLARATION OF PERFORMANCE

No. FLORIM 001 (EN) - Rev. 1

1. Unique identification code of the product type
Dry-pressed ceramic tiles, with water absorption $E_w \leq 0,5\%$

2. Intended use(s)
For internal and external walls and floorings

3. Name or registered trade mark, and contact address of the manufacturer
FLORIM CERAMICHE S.p.A. SB,
Via Canaletto, 24 - 41042 Fiorano Modenese (MO) - Italia

4. System(s) of assessment and verification of constancy of performance (AVCP)
System 4

5. Name and identification number of notified laboratory, if relevant - Not applicable
Task(s) carried out:
AVCP system
Document issued and date of issue:

6. Declared performances

Essential characteristics	Performance	Harmonised technical specification
Reaction to fire	A1-IA1	Based on the decision 96/603/CE and its changes EN 14411:2012
Release of dangerous substance, for:		
- Cadmium	NPD	
- Lead	NPD	
Breaking strength	> 1300 N	
Slipperiness	See table attached	
Tactility	NPD	
Bond strength/adhesion, for:		
Comestitious adhesive, type C2	NPD	
Thermal shock resistance	Pass	
Durability for:		
- internal use	Pass	
- external use: freeze-thaw resistance	Pass	

The performance of the product identified in point 1 is in conformity with the declared performances in point 6.
This declaration of performance is issued in accordance with regulation (EU) No. 305/2011, under the sole responsibility of the manufacturer identified in point 3.
This declaration is available on the website <https://www.florim.com/en/declarations-of-performance-cel>
Signed for and on behalf of the manufacturer by:

Bruno Donato - Amministratore Delegato



Importer Details:
European Ceramic Tiles Ltd
Address: 7A Cowley Place, Rosedale, AKL 0632
NZBN: 9429037294571
Website: euroceramics.co.nz

Note – this building product is not subject to a warning/ban under Section 26 of the Building Act 2004

FLORIM - Contemporary Design

Serie / Series / Kolekcja / Serija	BCRA DM 236/1989 (ITA)	DIN EN 16165 Annex B (DE)	UNE EN 16165 Annex C (ESP)
ANTIQUE MARBLE lucido	>0,4	N.P.D.	N.P.D.
ANTIQUE MARBLE matte	>0,4	N.P.D.	N.P.D.
ANTIQUE MARBLE STRUTTURATO	N.P.D.	R10	N.P.D.
ARTIFACT grip	>0,4	R12	N.P.D.
ARTIFACT naturale	>0,4	R10	N.P.D.
ELEMENTAL STONE grip	>0,4	R11	N.P.D.
ELEMENTAL STONE lucido	N.P.D.	N.P.D.	N.P.D.
ELEMENTAL STONE matte	>0,4	R10	N.P.D.
EXALT lucido	>0,4	N.P.D.	N.P.D.
EXALT naturale	>0,4	N.P.D.	N.P.D.
HI WOOD lucido	>0,4	N.P.D.	N.P.D.
HI WOOD naturale	>0,4	R10	N.P.D.
MAPS bocciardato	>0,4	R11	N.P.D.
MAPS bocciardato 2 cm	>0,4	R11	N.P.D.
MAPS matte	>0,4	R10	N.P.D.
MATCH UP comfort	>0,4	R10	N.P.D.
MATCH UP grip	>0,4	R11	N.P.D.
MATCH UP grip 20 mm	>0,4	R11	N.P.D.
MATERIAL STONES bocciardato 20 mm	>0,4	R11	N.P.D.
MATERIAL STONES grip	>0,4	R11	N.P.D.
MATERIAL STONES matte	N.P.D.	R9	N.P.D.
NATURAL STONE bocciardato 20 mm	>0,4	R11	N.P.D.
NATURAL STONE grip	>0,4	R11	N.P.D.
NATURAL STONE matte	>0,4	R10	Classe 2
ONIX OF CERIM lucido	>0,4	N.P.D.	N.P.D.
ONIX OF CERIM matte	>0,4	N.P.D.	N.P.D.
STONE LIFE GRIP	>0,4	R11	N.P.D.
STONE LIFE matte	>0,4	R10	N.P.D.
TIMELESS grip	>0,4	R11	N.P.D.
TIMELESS lucido	>0,4	N.P.D.	N.P.D.
TIMELESS matte	>0,4	R9	N.P.D.
WOODSLATE LIFE 20 mm strutturato	>0,4	R11	N.P.D.
WOODSLATE LIFE matte	>0,4	R10	N.P.D.
WOODSLATE LIFE strutturato	>0,4	R11	N.P.D.

GRES PORCELLANATO SMALTATO

GLAZED PORCELAIN STONEWARE / GRES CERAMIC ENVALE / GLASIRTE KERAMISZUG / GRES PORCELAINÉ ÉMAILLÉ
SQUADRATO - SQUARE - EQUARRI - REKTIFIZIR - ISKODRADIO

PEZZI SPECIALI

SPECIAL TILES/SPECIALS
FORMS/PLUCKE/PIECES SPECIALES

	COLOR	SURFACE	30x30 11 1/4" x 11 1/4"	30x30 11 1/4" x 11 1/4"	21x40 8 1/4" x 15 3/4"	4,6x60 1 7/8" x 23 1/4"
						
			INOXIAO Inoxia 2x3	INOXIAO 3D Inoxia 2x3	INOXIAO Inoxia 2x3	buttiscopa
TIMELESS	TIMELESS CALACATTA	LUCCO	747405	747371	747413	747255
		NATURALE	747389	747379	747390	747241
	TIMELESS AMANI (GREY)	LUCCO	747407	747373	747415	747257
		NATURALE	747392	747381	747399	747243
	TIMELESS CERPO DI GRE	LUCCO	747408	747374	747416	747258
		NATURALE	747393	747382	747400	747244
	TIMELESS BLACK DEEP	LUCCO	747409	747375	747417	747259
		NATURALE	747394	747383	747401	747245
	TIMELESS TRAVERTINO	LUCCO	747410	747376	747418	747260
		NATURALE	747395	747384	747402	747246
	TIMELESS MARFIL	LUCCO	747411	747377	747419	747261
		NATURALE	747396	747385	747403	747247



Importer Details:


European Ceramic Tiles Ltd

Address: 7A Cowley Place, Rosedale, AKL 0632


NZBN: 9429037294571

Website: euroceramics.co.nz

Note – this building product is not subject to a warning/ban under Section 26 of the Building Act 2004

[illegible]

GRADO DI VARIAZIONE CROMATICA - DEGREE OF COLOUR CHANGE - DEGRÉ DE VARIATION CHROMATIQUE - GRAD DER FARBEÄNDERUNG - GRADO DE VARIACIÓN CROMÁTICA

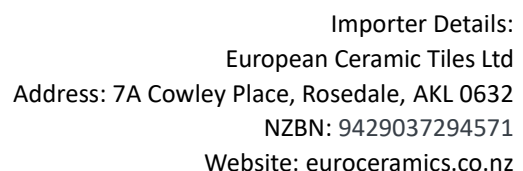

Note – this building product is not subject to a warning/ban under Section 26 of the Building Act 2004

Fire Resistance

The building code relating to fire rating regulations and standards requires specifiers to provide documentation such as fire certificates for materials used in construction.

Ceramics are in itself a fire-resistant material, mostly being manufactured at over 1200 degrees Celsius. Testing and providing such certification are therefore not relevant to the Ceramics industry.

Ceramic and Porcelain tiles are an inert material, and therefore non-combustible. They do not release fumes or toxic gases in the event of a fire. Porcelain tiles contain no sealants, waxes or other chemicals that could release VOC's into the environment. Ceramics do not pose a risk of spreading or intensifying a fire therefore there is no testing required as they do not contribute to a fire.

EXTRAORDINARY EFFECTS DURING USE PHASE:

Fire: According to /EN 13501-1:2007+A1:2009/, ceramic tiles can be classified as A1 class of fire resistance rating, because they do not contribute to fire.

It has been demonstrated that the coating of the ceramic tiles, in case of fire, reduces heat on them and thus the risk of collapse.

Water: Ceramic tiles cannot react with water because they are an insoluble material.

For further information on the fire performance characteristics of ceramic/porcelain tiles or natural stone, [please follow this link](#)

Design Requirements

- The designer/specifier must confirm that the selected product colour, finish, size and thickness is suitable for the intended location and service conditions.
- Floor finishes must be selected with regard to the required slip resistance for the intended use, including access routes and wet areas where applicable.
- The supporting substrate and complete tile system must be designed to be sufficiently stable, rigid, level and suitable for the tile format and loading.
- Wet-area design must include the required waterproofing system, falls, drainage, junctions and penetrations. Tiles and grout are not to be relied upon as the waterproofing system.
- Movement/control joints must be incorporated where required by the substrate, building movement, tile layout and installation system.
- For underfloor heating, the heating system, substrate, adhesive, grout and movement-joint design must be compatible with porcelain tile and the relevant manufacturers' requirements.
- For external cladding or other specialist applications, project-specific design, fixing, wind/seismic actions and system compatibility must be verified before installation.
- Natural variation in shade, caliber and appearance should be considered when approving samples and setting out the installation.



Importer Details:
European Ceramic Tiles Ltd
Address: 7A Cowley Place, Rosedale, AKL 0632
NZBN: 9429037294571
Website: euroceramics.co.nz

Note – this building product is not subject to a warning/ban under Section 26 of the Building Act 2004

Installation Requirements

- Installation must be carried out by a competent tile installer in accordance with NZ standards & the BRANZ best tiling practices guide, the tile manufacturer's instructions and the installation-product manufacturers' instructions.
- Confirm the product identity, colour, finish, size, calibration and quantity before installation. Do not install visibly damaged or incorrect tiles.
- The substrate must be sound, clean, dry as required by the selected system, adequately cured, dimensionally stable, level and free of contaminants that may impair adhesion.
- Where waterproofing is required, install an appropriate waterproofing system before tiling and complete all junctions, penetrations and terminations in accordance with the waterproofing manufacturer's requirements.
- Select adhesive and grout suitable for porcelain tile, tile format, substrate, environment and service conditions. Follow the adhesive/grout manufacturer's mixing, open-time, coverage and curing requirements.
- Provide adhesive coverage appropriate to the application and tile format. Large-format and external/specialist installations may require additional measures to achieve adequate support and coverage.
- Provide movement joints and perimeter joints where required; do not bridge structural or substrate movement joints with rigid tile finishes.
- Maintain appropriate joint widths and setting-out tolerances. The supplier technical sheet included in the existing BPIR should be consulted for product-specific joint guidance.
- Protect the completed installation from traffic, moisture, impact and other loads until the adhesive, grout, sealants and associated systems have cured.
- For further installation information [please refer to this link](#) for porcelain, ceramic & natural stone.

Maintenance Requirements

- Clean routinely using clean water and a suitable neutral or manufacturer-approved tile cleaner. Follow the cleaning-product manufacturer's instructions.
- Remove spills and contaminants promptly. Cleaning frequency should reflect the location, traffic and contamination level.
- Do not use cleaning methods or chemicals that may damage grout, sealants, adjacent materials or any decorative/special surface finish. Confirm chemical compatibility before use.
- Avoid abrasive tools or cleaning methods that may scratch or alter the surface appearance.
- Maintain grout, flexible sealant and movement joints. Inspect them periodically and repair or replace deteriorated material where necessary.
- Where slip resistance is important, maintain the surface so that residues, oils, soap, coatings or other contaminants do not materially reduce slip performance.
- For further maintenance information [please refer to this link](#) for porcelain, ceramic & natural stone.



Importer Details:
European Ceramic Tiles Ltd
Address: 7A Cowley Place, Rosedale, AKL 0632
NZBN: 9429037294571
Website: euroceramics.co.nz

Note – this building product is not subject to a warning/ban under Section 26 of the Building Act 2004